

# BABY LOCK SEWING ACCESSORIES

## Zipper Foot

(BLQP-ZF)


### Instructions

This is the best sewing foot for inserting zippers, snap tape, and more. The toe of the foot is narrow for more visibility and precision. Adjust the needle to either the right or left to sew both sides of your zipper easily. You can also use it to attach piping or decorative cording.


#### INSTRUCTIONS:

- When attaching zippers to stretch fabrics, use the pin feed method and adjust foot pressure accordingly.
- The zipper foot can also be used as a guide when attaching piping to fabric.


1. Raise the presser foot and raise the needle to the highest position.
2. Loosen and remove screw using the screwdriver included with your machine.

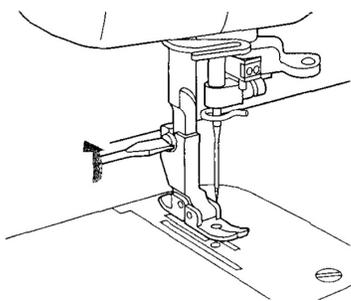


3. Attach the zipper foot and tighten the screw.

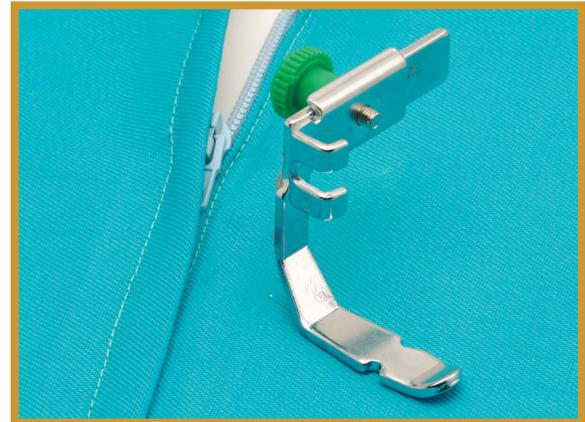

4. Turn the handwheel toward you to lower the needle. Adjust the position of the foot relative to the needle using the adjustment screw to slide the foot from left to right. Then tighten the zipper foot adjustment screw.

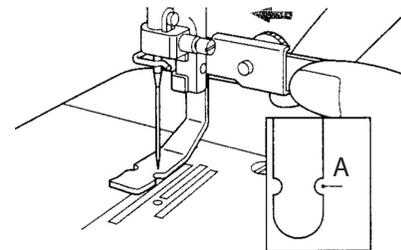

5. Line up the zipper to the section of fabric it will be attached to and mark the base of the opening on the fabric. It should be set approximately ¼ inch (0.5 cm) below zipper stop. Sew from below the base of the opening.

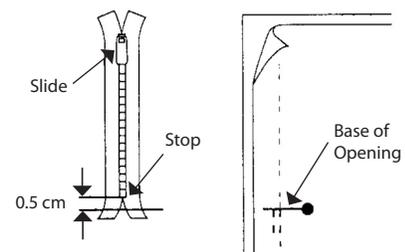


**FOR THE LOVE OF SEWING**

# Zipper Foot


(BLQP-ZF)

## Instructions (continued)

6. Fold one side of the seam allowance with the overlap of the zipper position facing down 1/8 inch (0.2 cm) on the outside of the mark.


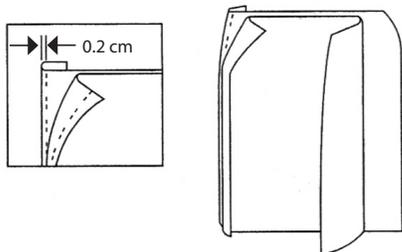


7. Secure the zipper with basting and sew along the mark.

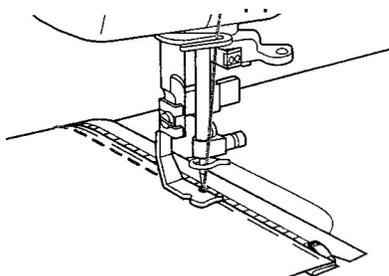


**NOTE:** Make sure the needle does not strike the metal part of the zipper when sewing. The needle may break and cause injury.

9. Line up the folded hem on the opposite side with the stitches.

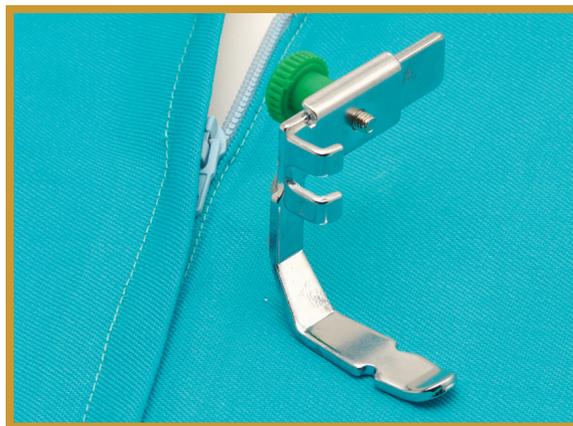


10. Loosen the zipper foot screw to change the position of the zipper foot.

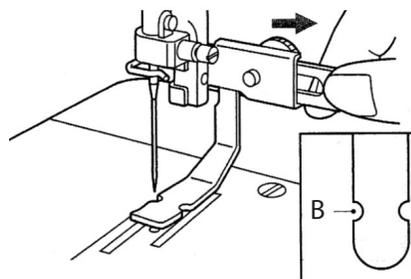

11. Turn the handwheel to lower the needle, position the presser foot and tighten the adjustment screw before sewing.

12. With the fabric right side up, baste the zipper onto the fabric and then sew the edge of the basting.

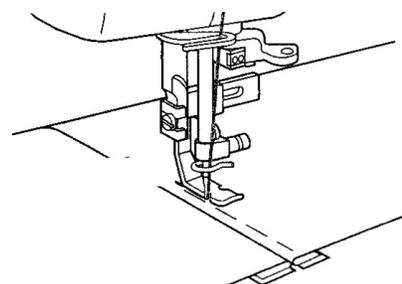

- Reinforce base of opening by sewing over it twice.
- If the zipper slide gets in the way, lower the needle all the way through the fabric, lift the foot and move the slider out of the way.



**FOR THE LOVE OF SEWING**